

rotronic

Datenblatt - Fiche technique - Data sheet

11.01.6260




ROLINE RS232-Kabel 9pol ST-BU, 6,0m

ROLINE Câble RS-232 9 pôles M/F, 6,0m

ROLINE RS232 Cable, DB9 M – F, 6 m

1800±50/-0MM

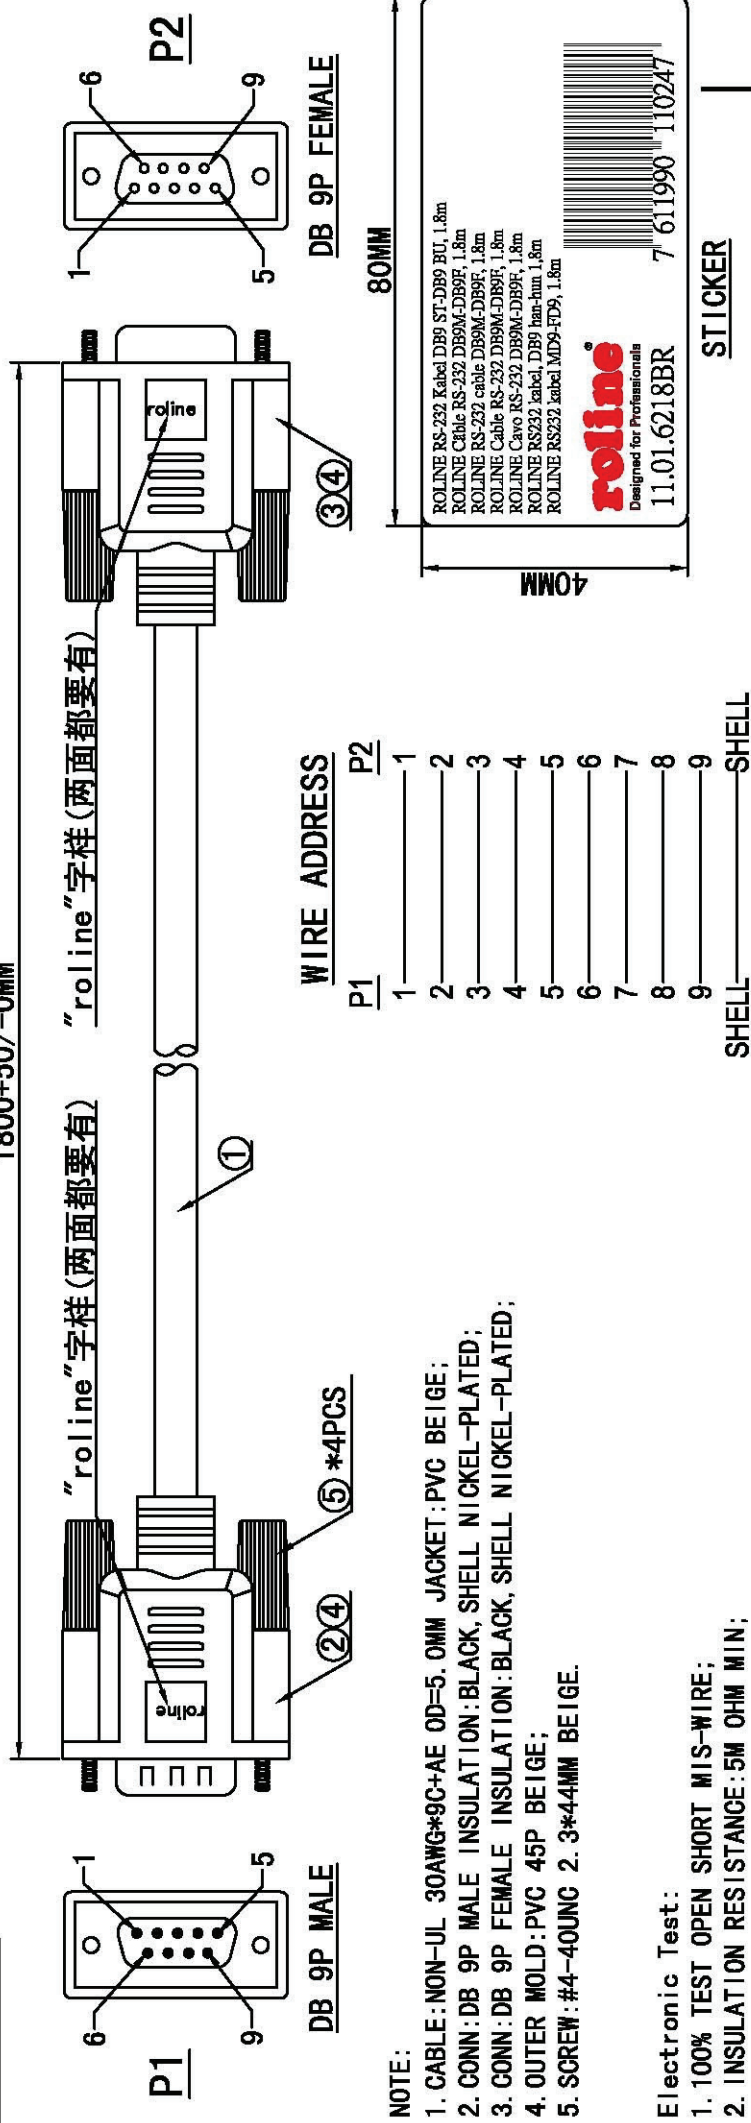


NOTE:

1. CABLE:NON-JUL 30AWG*9C+AE OD=5.0MM JACKET:PVC BEIGE;
2. CONN:DB 9P MALE INSULATION:BLACK, SHELL NICKEL-PLATED;
3. CONN:DB 9P FEMALE INSULATION:BLACK, SHELL NICKEL-PLATED;
4. OUTER MOLD:PVC 45P BEIGE;
5. SCREW:#4-40UNC 2.3*44MM BEIGE.

Electronic Test:

1. 100% TEST OPEN SHORT MIS-WIRE;
2. INSULATION RESISTANCE:5M OHM MIN;

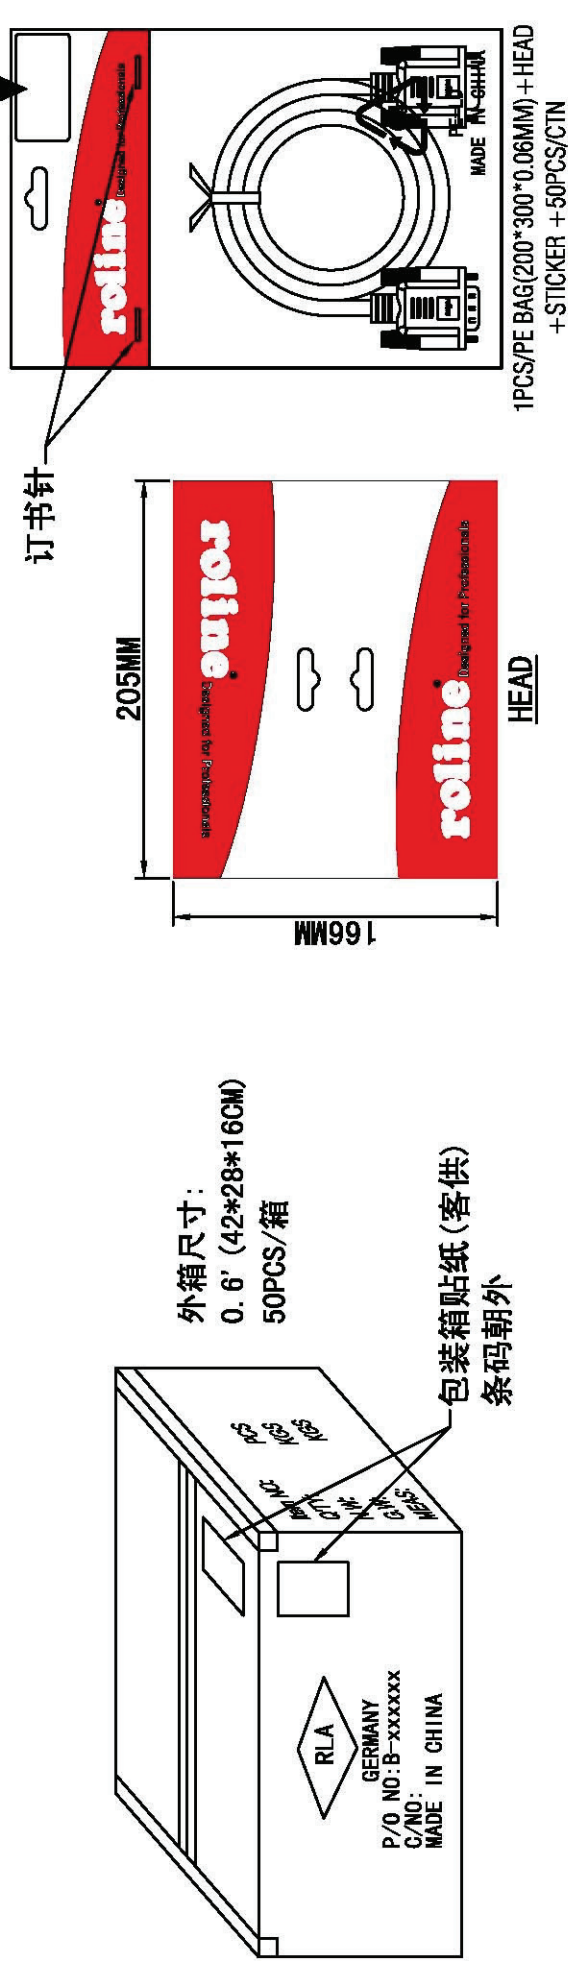

Company	Goods Code	Draw	FC038	Jack	Date	2012-07-14	Rotronic Co., Ltd			D	
ITEM NO	11.01.6218	Check			Date		C			C	
Goods NO		Approval			Date		B			B	
origina1NO.	Unit (MM)				Date		VER. A			REVISE	
					Date					Date	